





1/2" N

105

105

1/2" N


1 1/2" N

2022 1 1 -2022 12 31


48.3 kg CO₂-eq



1.	3
2.	3
3.	3
4.		

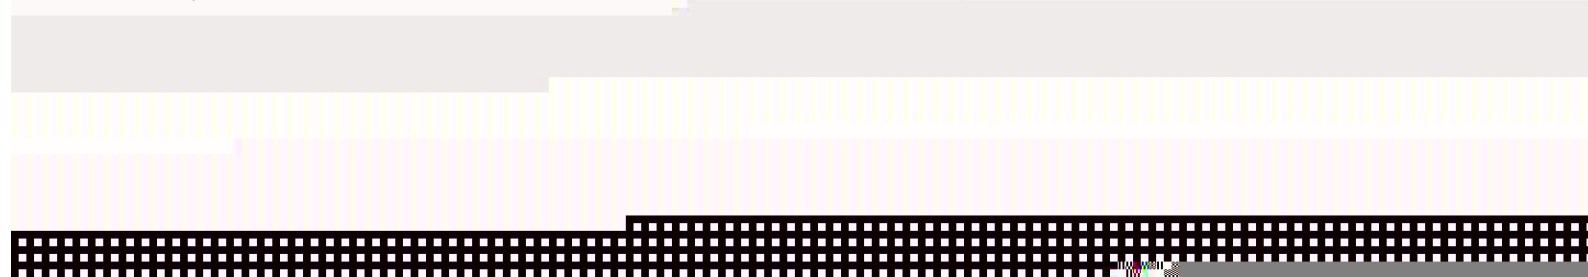



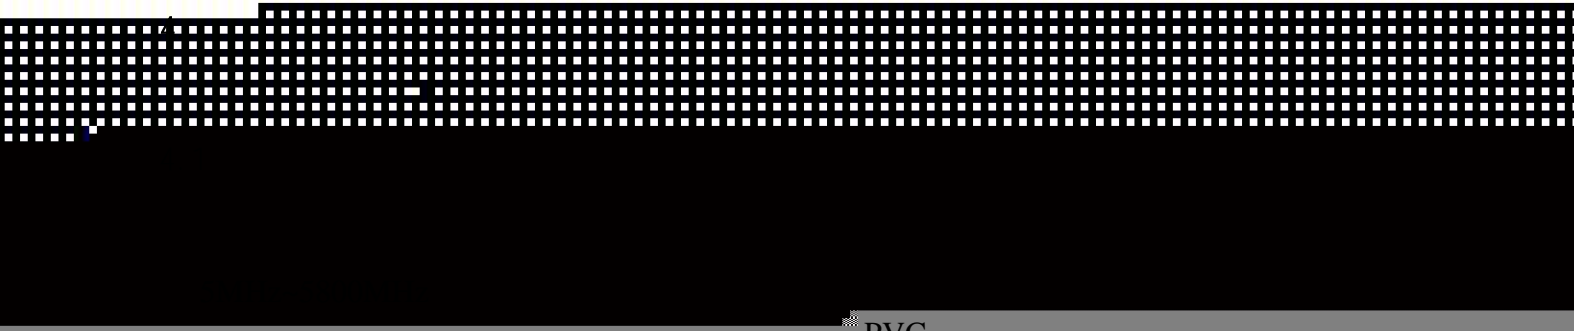

PVC

4.2

1/2" N

4.3

4.4

4.4.1



4. 4. 2



Pin	NML1/2H. 00. 02-HPb55-3/-HX	3		0.9	g
Inner core	NML1/2B. 02. 02- /-HX	3		1.24	g
Rear insulator	NML1/2F. 00. 08-TPX/-		TPX	0.15	g
Insulator	NML1/2F. 00. 07-TPX/-		TPX	0.25	g
Seal ring	NML1/2H. 00. 06- R01/-			0.15	g
PVC PVC flat pad	NML1/2E. 00. 08-PVC R01/-		PVC	0.22	g
Circlip	NML1/2F. 00. 06-SUS304/-		304#	0.37	g
packaging				1/300	p

2

		5T	171	km
		30T	57	

3

--	--



W-08-23-0884

7

11

Технический

5005-200

2012

ш

(.)

2

2022 10

"





2022 1 1 2022 12 31

6.2

0.5%

6.2.1

cut-of

6.2.2

6.3

2019

GWP100

IPCC

7


<hr/>		48.3	kgCO ₂ -eq
Upstream transportation		0.003	
Raw material assembly		8.57	
Packaging		0.121	
Downstream transportation		39.6	
<hr/>			kgCO ₂ -eq
Enclosure		0.737	
Inner core		0.783	
Seal ring		0.777	
Screw insert		0.788	
Circlip		0.24	
Insulator		1.29	
Rear housing		0.787	
Rear insulator		0.777	
Cable clamp		0.661	




PVC Pin
PVC flat pad

0.584
1.14

7.1

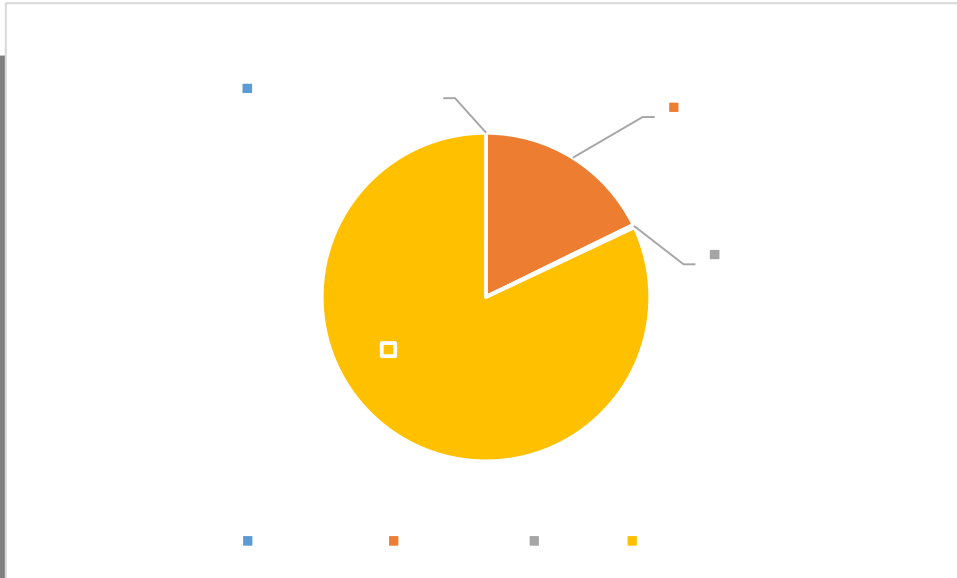

1

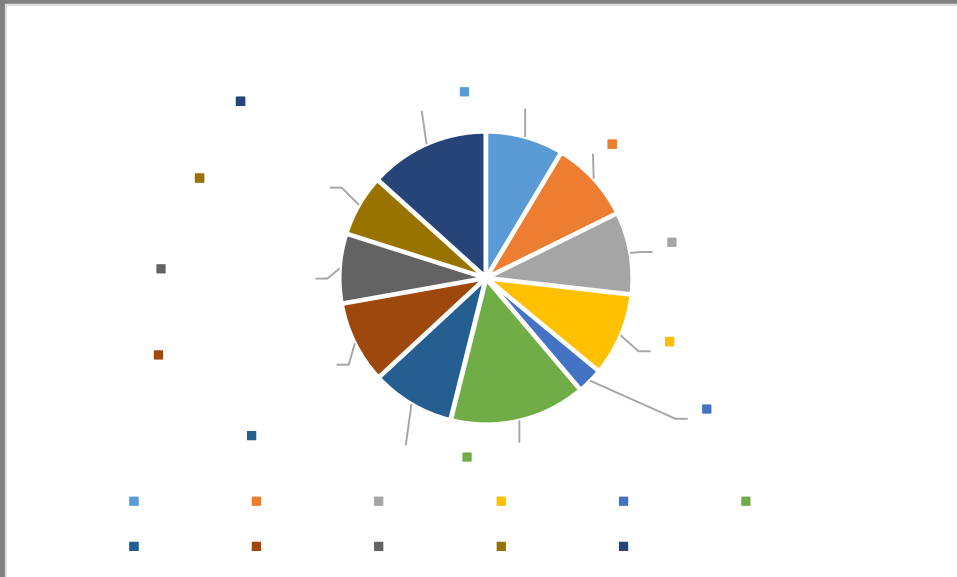

2




7.2

7.2.1

cut-of

7.2.2

IPCC 2021 GWP100 V1.01



3

-

GWP100

47.9 kg CO₂-eq

2.85

48.3 kg CO₂-eq

5.92%

95%

7.3



2023

8

8.1

8.2

8.3

8.4

